




- Flat spray pattern with stable distribution and tapered spray pattern edges.
- Easy to install. Just drill a hole (ø14.3 mm) into the pipe and insert the nozzle.
- Quick-detachable design helps to reduce maintenance time significantly.
- Spray direction is adjustable within 50 degrees as desired.
- Nozzle tips are color-coded by spray capacity for easy identification.
- Adaptors, color-coded by size, are available in 1", 1 1/4", 1 1/2", 2", 25A, and 30A.
- O-ring seals between the pipe and adaptor for pressures of up to 0.4 MPa.
- Double locked with an optional fitting spring lock.



[STANDARD PRESSURE]
0.3 MPa

[APPLICATIONS]

Pre-treatment for painting of cars, electric appliances for the home
Cleaning: water rinse after acid treatment of steel plates, water rinsing process in food factory

Structure	<ul style="list-style-type: none"> • Includes a nozzle tip, ball section, and adaptor. • Worn-out nozzle tips can be replaced separately.
Material	<ul style="list-style-type: none"> • Main parts: FRPP • Packing: FEPM • O-ring: NBR • Spring clip and lock: S304

[QB for metal pipes]

Pipe size (inch) ^{*1}	Color of adaptor	Dimensions (mm)						Weight (g)
		L1	L2	L3	L4	øD1	øD2	
1	Blue	105	89	72	55	34	48	61
1 1/4	Green	114	98	76	55	42.7	48	
1 1/2	Yellow	120	104	79	55	48.6	48	
2	Orange	132	116	85	55	60.5	48	

*1) Pipes should be stainless steel pipes and compliant with JIS G 3459.


[QB for PVC pipes]

Pipe size (ND) ^{*2}	Color of adaptor	Dimensions (mm)						Weight (g)
		L1	L2	L3	L4	øD1	øD2	
25A	Blue	103	87	71	55	32	48	61
30A	Green	109	93	74	55	38	48	
40A	Yellow	120	104	79	55	48.6	48	
50A	Orange	132	116	85	55	60.5	48	

*2) Pipes should be PVC pipes and compliant with JIS K 6742.
40A, 50A adaptors for PVC pipes are the same as 1 1/2", 2" adaptors for metal pipes.

[Note] Appearance and dimensions may differ slightly depending on material and nozzle code.

DRAWING

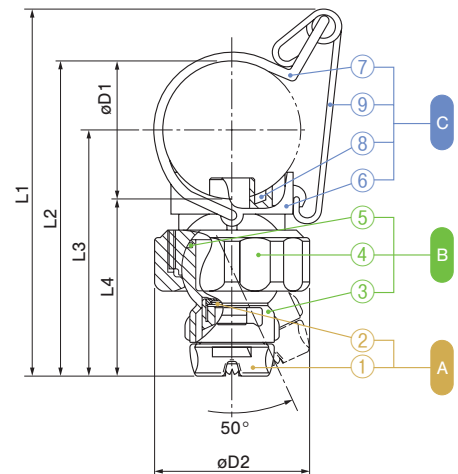



- A) Nozzle tip** (① Nozzle tip ② Packing [FEPM])
- B) Ball section** (③ Ball ④ Cap ⑤ O-ring [NBR])
- C) Adaptor** (⑥ Adaptor ⑦ Spring clip ⑧ O-ring [NBR] ⑨ Spring lock^{*3})

*3) ⑨ is optional, at extra cost.

Spray angle code	Spray capacity code	Pipe size		Spray capacity (L/min)				Mean droplet diameter (µm)	Free passage diameter (mm)	Color of nozzle tip
		(inch)	(ND)	0.1 MPa	0.2 MPa	0.3 MPa	0.4 MPa			
80	80	1,	25A,	4.62	6.53	8.00	9.24	}	1.7	Red
	100			5.77	8.16	10.0	11.5		2.0	Grey
	120	1 1/4 (1*1/4),	30A,	6.93	9.80	12.0	13.9		2.3	Black
	160			9.24	13.1	16.0	18.5		2.7	Blue
	180	1 1/2 (1*1/2),	(40A),	10.4	14.7	18.0	20.8		2.8	Orange
	200			11.5	16.3	20.0	23.1		2.8	Green
	240	or	or	13.9	19.6	24.0	27.7		3.2	Light Blue
	280			16.2	22.9	28.0	32.3		3.6	Red
	390	2	(50A)	22.5	31.8	39.0	45.0		4.3	Grey

Quick-installation Nozzles
QB SERIES

Flat Spray

Spray angle code	Spray capacity code	Pipe size		Spray capacity (L/min)				Mean droplet diameter (µm)	Free passage diameter (mm)	Color of nozzle tip
		(inch)	(ND)	0.1 MPa	0.2 MPa	0.3 MPa	0.4 MPa			
65	80	1, 1 1/4 (1*1/4), 1 1/2 (1*1/2),	25A, 30A, (40A),	4.62	6.53	8.00	9.24	}	1.8	
	100			5.77	8.16	10.0	11.5		2.2	
	120			6.93	9.80	12.0	13.9		2.4	
	160			9.24	13.1	16.0	18.5		2.8	
	180			10.4	14.7	18.0	20.8		3.0	
	200			11.5	16.3	20.0	23.1		3.3	
	240			13.9	19.6	24.0	27.7		3.6	
	280			16.2	22.9	28.0	32.3		3.8	
390	22.5	31.8	39.0	45.0	4.5					
40	80	or	or	4.62	6.53	8.00	9.24	}	2.2	
	100	2	(50A)	5.77	8.16	10.0	11.5		2.5	
	120			6.93	9.80	12.0	13.9		2.8	
	160			9.24	13.1	16.0	18.5		3.2	
	180			10.4	14.7	18.0	20.8		3.3	
	200			11.5	16.3	20.0	23.1		3.6	
	240			13.9	19.6	24.0	27.7		3.9	
	280			16.2	22.9	28.0	32.3		4.3	
390			22.5	31.8	39.0	45.0	5.1			

[Note] IN-series nozzle tips (including INVV on page 21, INJX on page 67) are not compatible with the QB series.

 CAUTIONS


Maximum operating pressure is 0.4 MPa.

Do not use under conditions where sudden or drastic changes in water pressure may occur.




HOW TO ORDER

To inquire about or order a specific nozzle please refer to this coding system.

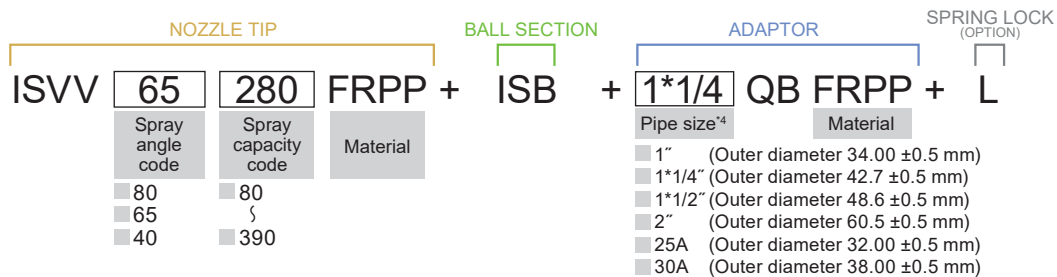Example: ISVV 65280 FRPP + ISB + 1*1/4 QB FRPP + L



Related Products

Product	Picture	Features														
<p>Hollow Cone Spray Nozzle BAA+QB Series</p>		<ul style="list-style-type: none"> • Make an air washer nozzle for air conditioning humidification, by combining a AA series nozzle, a hollow cone spray nozzle, with a QB series adaptor and ball parts. • Includes a spring lock to firmly secure the nozzle in place. • No-whirler design with a large free passage diameter minimizes clogging. <p>[Note] The spray direction is NOT adjustable, the ball is fixed in place.</p>														
<p>Ball Joint Adaptor QBP Series</p>	 <p>(Photo below shows QBP adaptor with a spray nozzle)</p> 	<ul style="list-style-type: none"> • IKEUCHI's spray nozzles with R1/4, R3/8, or R1/2 thread are attachable. • The ball joint makes the spray direction adjustable within 50 degrees as needed. • Easy installation onto a pipe with a spring clip fastener. • Main material: FRPP <table border="1" data-bbox="774 1126 1497 1296"> <thead> <tr> <th colspan="4">Pipe size</th> </tr> </thead> <tbody> <tr> <td rowspan="4">QBP for metal pipes (inch)</td> <td>1</td> <td rowspan="4">QBP for PVC pipes (ND)*</td> <td>25A</td> </tr> <tr> <td>1 1/4</td> <td>30A</td> </tr> <tr> <td>1 1/2</td> <td>40A</td> </tr> <tr> <td>2</td> <td>50A</td> </tr> </tbody> </table> <p>*40A, 50A adaptors for PVC pipes are the same as 1 1/2", 2" adaptors for metal pipes.</p>	Pipe size				QBP for metal pipes (inch)	1	QBP for PVC pipes (ND)*	25A	1 1/4	30A	1 1/2	40A	2	50A
Pipe size																
QBP for metal pipes (inch)	1	QBP for PVC pipes (ND)*	25A													
	1 1/4		30A													
	1 1/2		40A													
	2		50A													
<p>IS PLUG</p>		<ul style="list-style-type: none"> • The IS plug can be attached to the QB series instead of the QB nozzle tip. • When ordering, use the item name: IS PLUG PP (FEPM). FEPM packing is included. 														